


DS/Z44/944H-10C~100

主要外形和连接尺寸 Main external and connection dimension

单位Unit:mm

公称 通径 DN	主要外形和连接尺寸(mm) Main external and connection dimension									手动 Manual		电动 Electrical	
	L	D	D ₁	D ₂	D ₆	f	b	f ₂	Z-φd	H	D ₀	H	电动装置 Electric device
DS/Z40H-64 DS/Z940H-64													
50	250	175	135	105	88	3	26	4	4-23	337	300	622	DZW10
65	280	200	160	130	110	3	28	4	8-23	441	300	714	DZW15
80	310	210	170	140	121	3	30	4	8-23	496	350	765	DZW20I
100	350	250	200	168	150	3	32	4.5	8-25	578	400	840	DZW20I
125	400	295	240	202	176	3	36	4.5	8-30	588	400	852	DZW30
150	450	340	280	240	204	3	38	4.5	8-34	610	450	875	DZW30
200	550	405	345	300	260	3	44	4.5	12-34	744	550	1195	DZW45
250	650	470	400	352	313	3	48	4.5	12-41	867	650	1225	DZW60
300	750	530	460	412	364	4	54	4.5	16-41	996	750	1393	DZW90
350	850	595	525	475	422	4	50	5	16-41	1142	850	1507	DZW120I
400	950	670	585	525	474	4	66	5	16-48	1537	900	2075	DZW180
DS/Z40H-100 DS/Z940H-100													
50	250	195	145	112	88	3	28	4	4-25	337	300	622	DZW10
65	280	220	170	138	110	3	32	4	8-25	441	300	714	DZW15
80	310	230	180	148	121	3	34	4	8-25	496	350	765	DZW20I
100	350	265	210	172	150	3	38	4.5	8-30	578	400	840	DZW30I
125	400	310	250	210	176	3	42	4.5	8-34	588	400	852	DZW30
150	450	350	290	250	204	3	46	4.5	12-34	610	450	875	DZW45
200	550	430	360	312	260	3	54	4.5	12*41	744	550	1195	DZW60
250	650	500	430	382	313	3	60	4.5	12-41	867	650	1225	DZW90I
300	750	585	500	442	364	4	70	4.5	16-48	996	750	1393	DZW120I
350	850	655	560	498	422	4	76	5	16-54	1142	850	1507	DZW180
400	950	715	620	558	474	4	80	5	16-54	1537	950	2075	DZW250

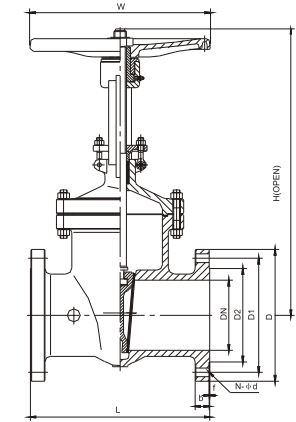

主要外形和连接尺寸 Main external and connection dimension

单位Unit:mm

公称压力 PN	公称通径 DN	主要外形和连接尺寸(mm) Main external and connection dimension								
		L	D	D ₁	D ₂	b	f	H	Z-φd	
1.6MPa	1000	1200	1255	1170	1110	49	5	/	28-42	
	900	1100	1050	1005	1005	47	5	/	28-39	
	800	1000	1020	950	905	45	5	/	24-39	
	700	900	910	840	800	43	5	/	24-36	
	600	800	840	770	685	41	5	/	20-36	
	500	700	710	650	585	38	4	/	20-33	
	450	650	640	585	532	34	4	/	20-30	
	400	600	580	525	482	32	4	/	16-30	
	350	550	520	470	430	28	4	/	16-26	
	300	500	460	410	370	24	4	/	12-26	
	250	450	405	355	320	23	3	/	12-26	
	200	330	335	295	268	21	3	/	12-22	
	150	280	280	240	212	19	3	/	8-22	
	100	230	215	180	158	17	3	/	8-18	
80	210	195	160	133	17	3	/	8-18		
65	195	180	145	122	15	3	/	4-18		
50	180	160	125	102	13	3	/	4-18		
2.5MPa	1000	1200	1315	1210	1140	59	5	/	28-56	
	900	1100	1185	1090	1030	57	5	/	28-48	
	800	1000	1075	990	930	55	5	/	24-48	
	700	900	960	875	820	53	5	/	24-42	
	600	800	840	770	720	49	5	/	20-39	
	500	700	730	660	615	44	4	/	20-36	
	450	650	660	600	555	42	4	/	20-36	
	400	600	610	550	505	40	4	/	16-36	
	350	550	550	490	450	36	4	/	16-33	
	300	500	485	430	390	32	4	/	16-30	
	250	450	425	370	335	29	3	/	12-30	
	200	400	360	310	278	29	3	/	12-26	
	150	350	300	250	212	25	3	/	8-26	
	100	300	230	190	158	21	3	/	8-22	
80	280	195	160	133	19	3	/	8-18		
65	265	180	145	122	19	3	/	8-18		
50	250	160	125	102	17	3	/	4-18		
4.0MPa	800	1650	1135	1030	960	71	5	/	24-56	
	700	1450	995	900	840	63	5	/	24-48	
	600	1350	890	795	735	58	5	/	24-45	
	500	1150	755	670	615	58	4	/	20-42	
	450	1050	680	610	560	56	4	/	20-39	
	400	950	655	585	535	54	4	/	16-39	
	350	850	570	510	465	48	4	/	16-36	
	300	750	510	450	410	42	4	/	16-33	
	250	650	445	385	345	39	3	/	12-33	
	200	550	375	320	285	35	3	/	12-30	
	150	450	300	250	212	27	3	/	8-26	
	100	350	230	190	158	23	3	/	8-22	
	80	310	195	160	133	21	3	/	8-18	
	65	280	180	145	122	19	3	/	8-18	
50	250	160	125	102	17	3	/	4-18		
6.4MPa	400	950	670	585	535	480	62	4	16-42	
	350	850	595	525	465	420	56	4	16-39	
	300	750	530	460	410	375	50	4	16-36	
	250	650	470	400	345	320	45	3	12-36	
	200	550	405	345	285	265	41	3	12-36	
	150	450	340	280	240	205	35	3	8-33	
	100	350	250	200	170	145	29	3	8-26	
	80	310	210	170	133	115	27	3	8-22	
	65	280	200	160	132	110	25	3	8-22	
	50	250	175	135	102	85	23	3	4-22	
	10MPa	400	950	715	620	535	480	76	4	16-52
		350	850	655	560	465	420	72	4	16-52
		300	750	585	500	410	375	66	4	16-45
		250	650	500	430	345	320	57	3	12-39
200		550	430	365	285	265	51	3	12-39	
150		450	350	290	250	205	43	3	12-33	
100		350	265	210	175	145	35	3	8-30	
80		310	230	180	150	115	31	3	8-26	
65		280	220	170	140	110	29	3	8-26	
50		250	195	145	102	85	25	3	4-26	

ООО «ТИ-СИСТЕМС» ИНЖИНИРИНГ И ПОСТАВКА ТЕХНОЛОГИЧЕСКОГО ОБОРУДОВАНИЯ

Интернет: www.tisys.ru www.tisys.kz www.tisys.by www.tesec.ru www.ти-системс.рф

Телефоны: +7 (495) 7774788, 7489626, (925) 5007155, 54, 65

Эл. почта: info@tisys.ru info@tisys.kz info@tisys.by