

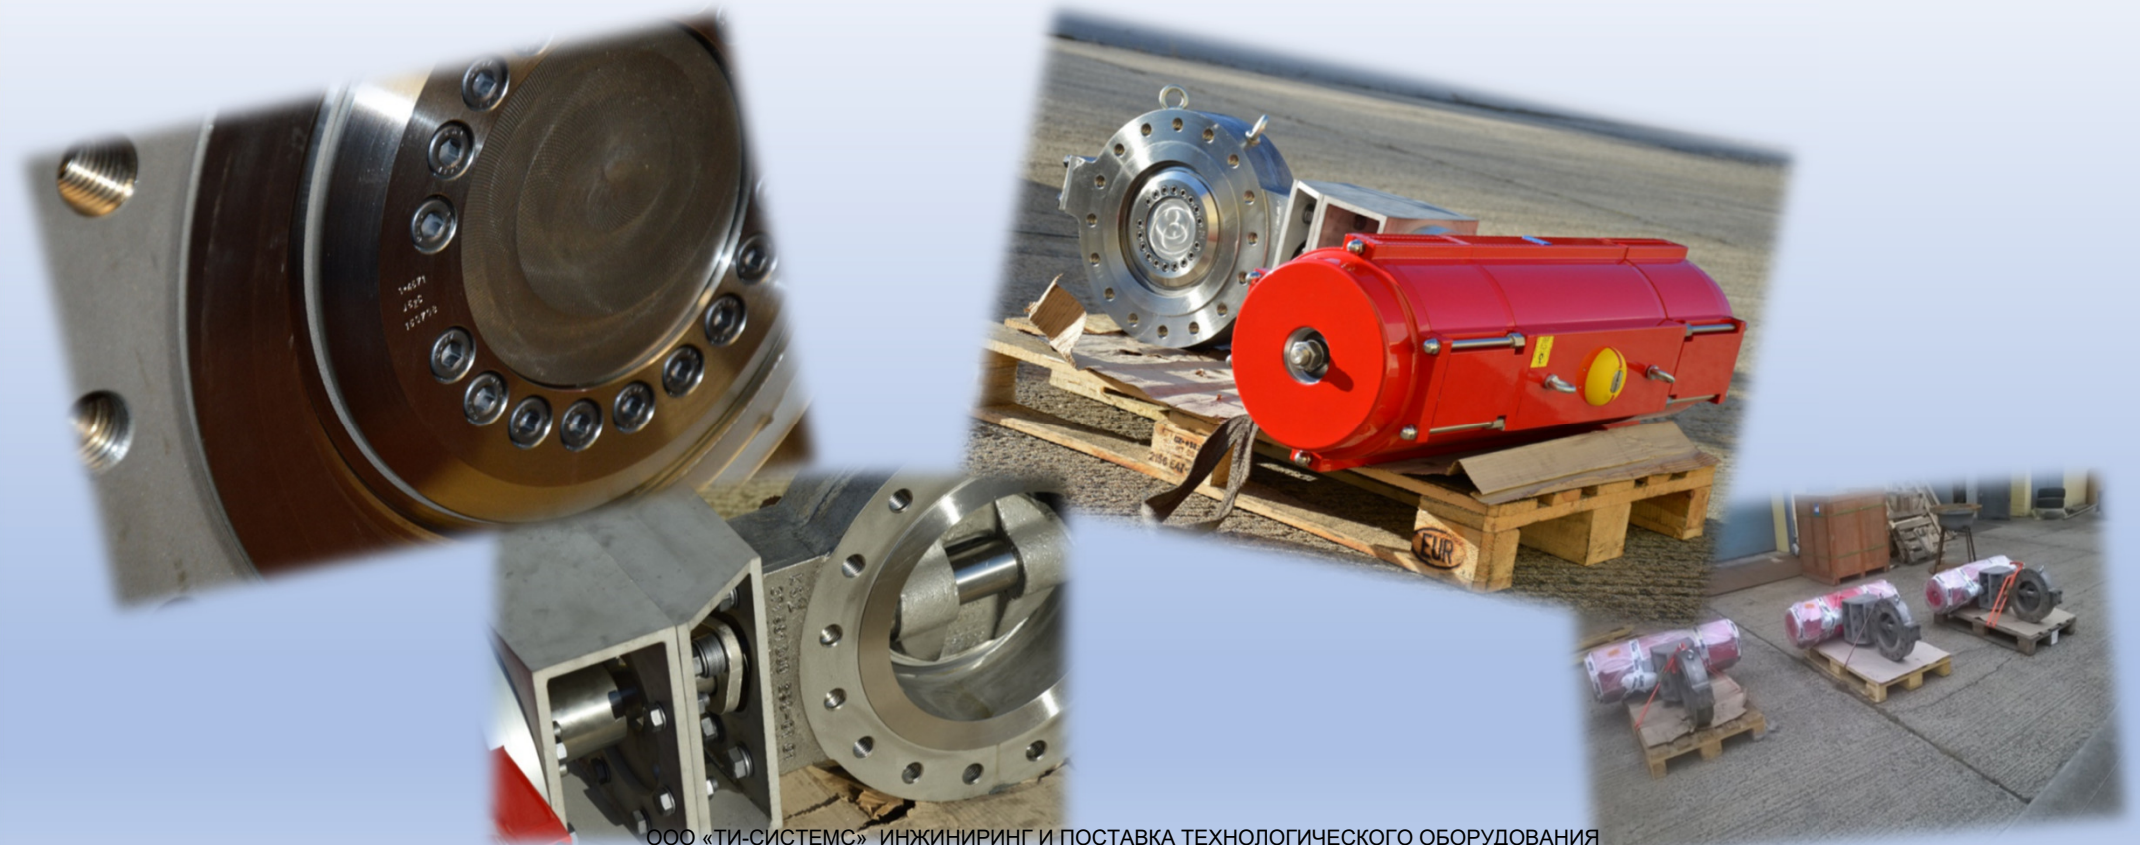
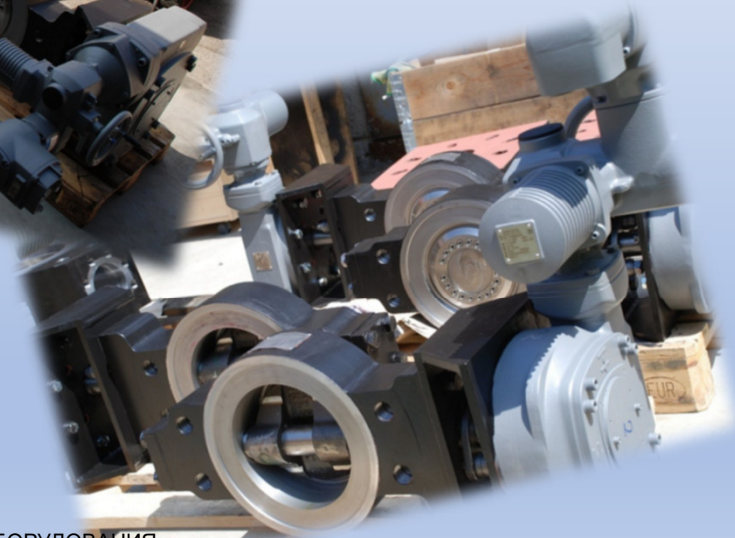




4 offset butterfly valves – DN250, design Class600, full stainless steel, 100% tightness, 100% EU

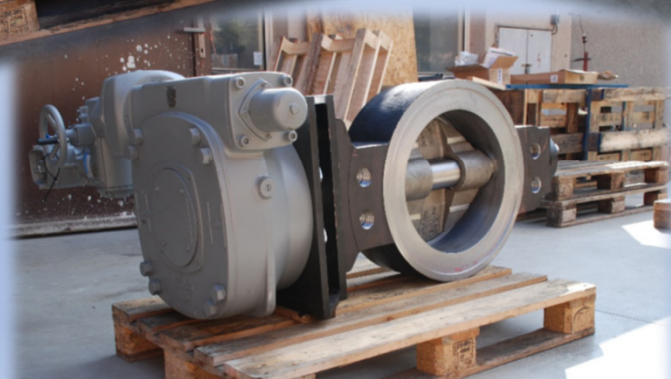


4 offset butterfly valves – DN500/250, PN100, 100% tightness, 100% EU, traceable origin

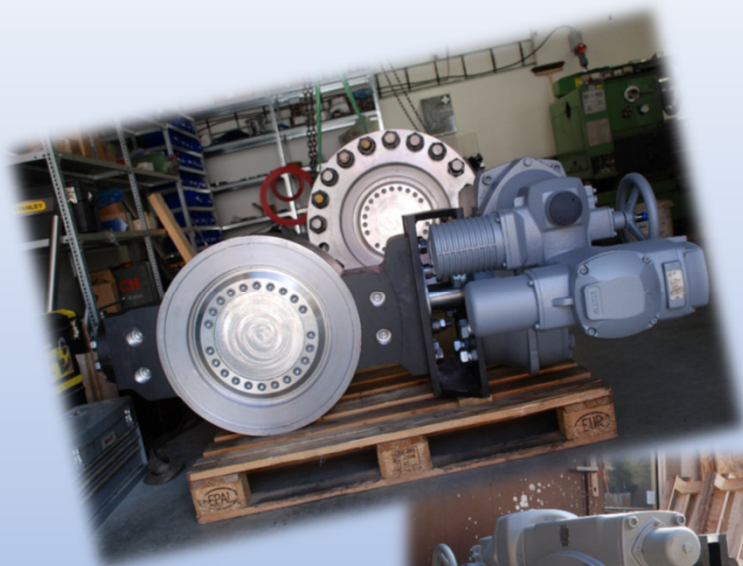

4 offset butterfly valves – DN150, PN63, 100% tightness, 100% EU, traceable origin, ss

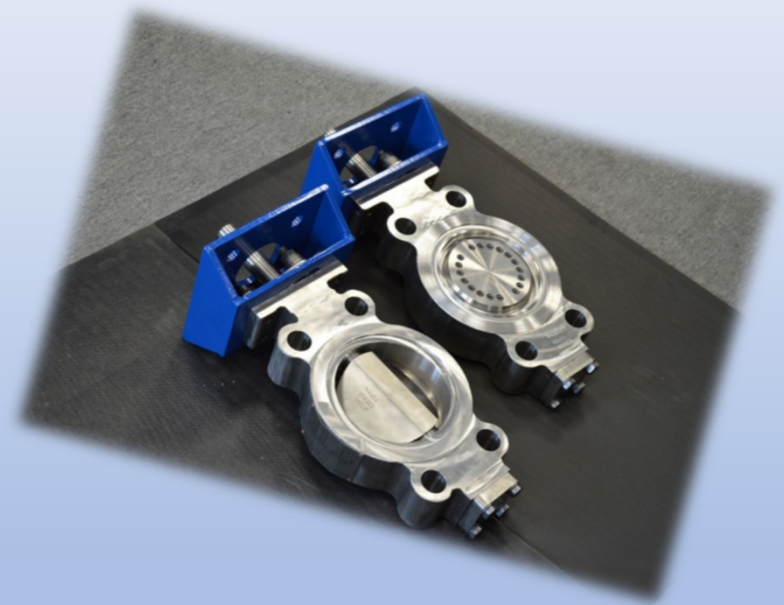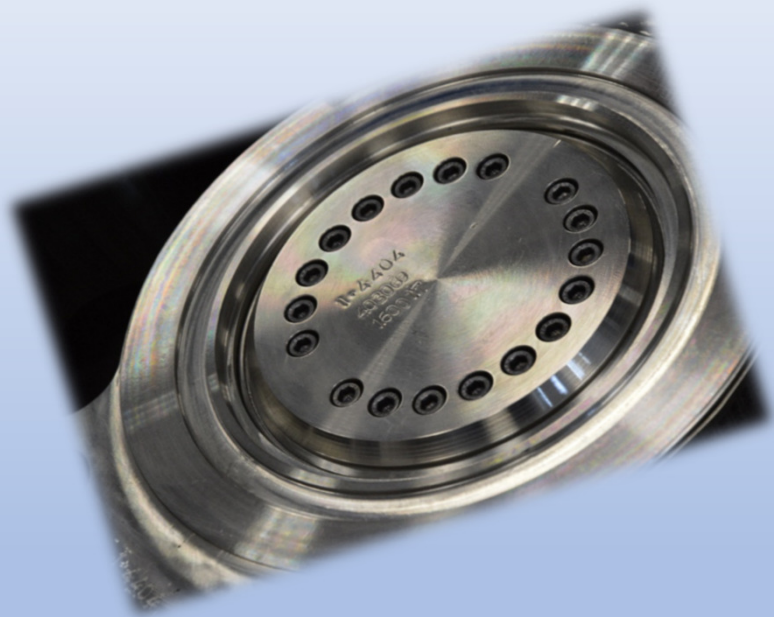


4 offset butterfly valves – DN400, PN40, 100% tightness, 100% EU, traceable origin

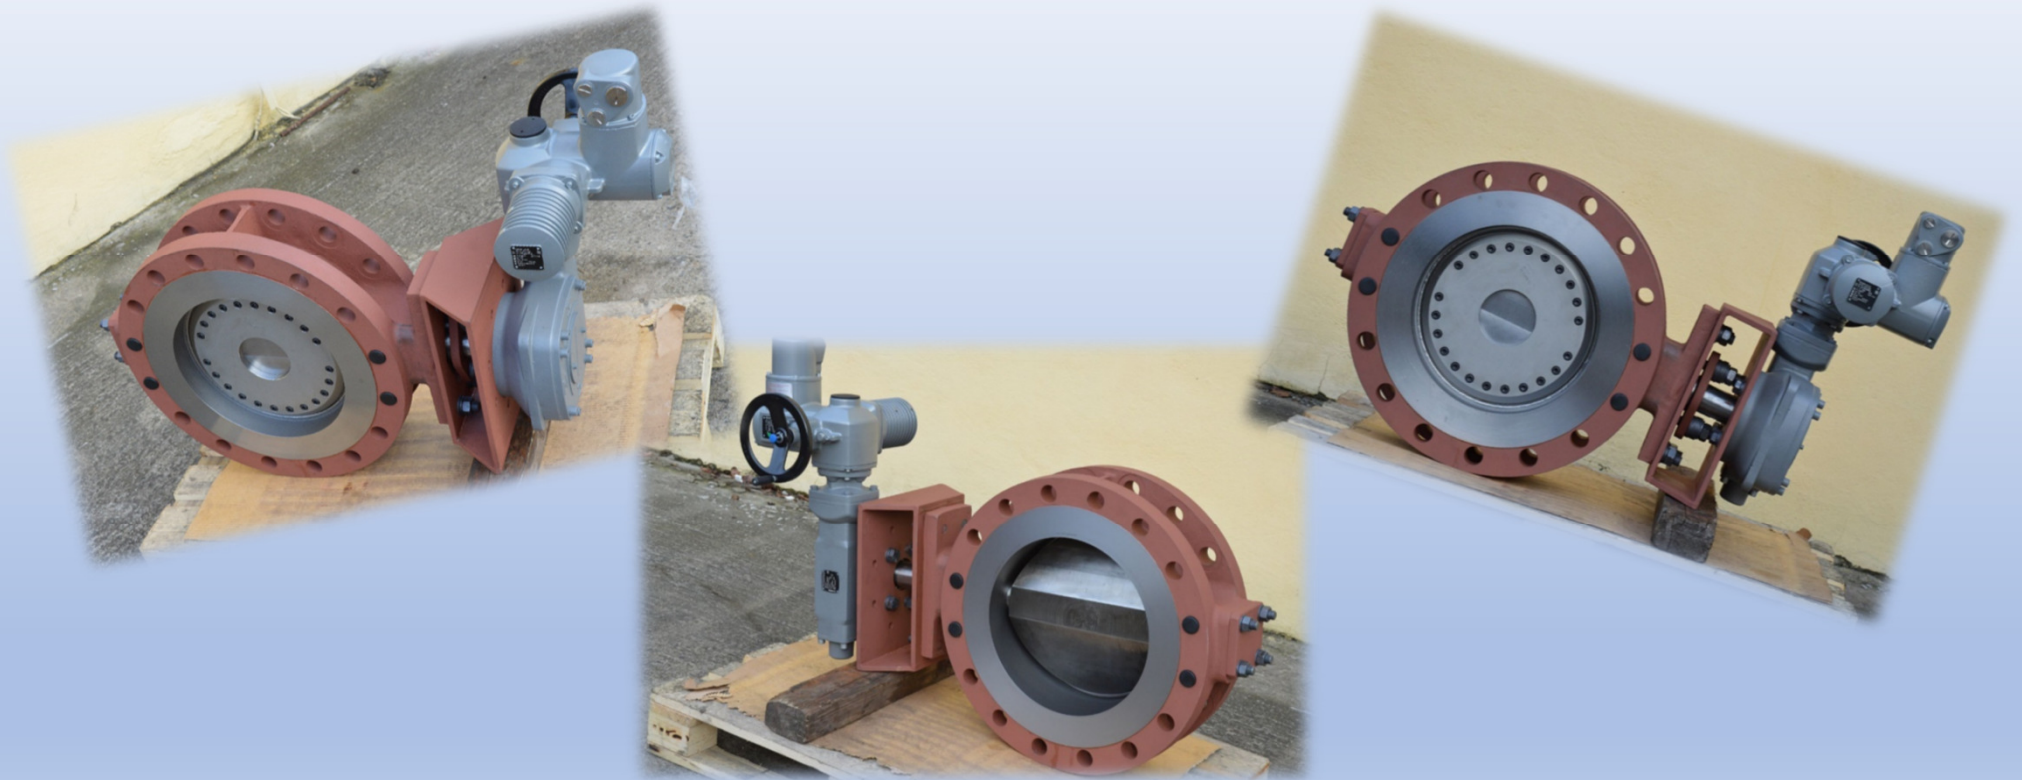

4 offset butterfly valves – DN900, PN25, 100% tightness, 100% EU, traceable origin



4 offset butterfly valves – DN150, Class300, 100% tightness, 100% EU, traceable origin

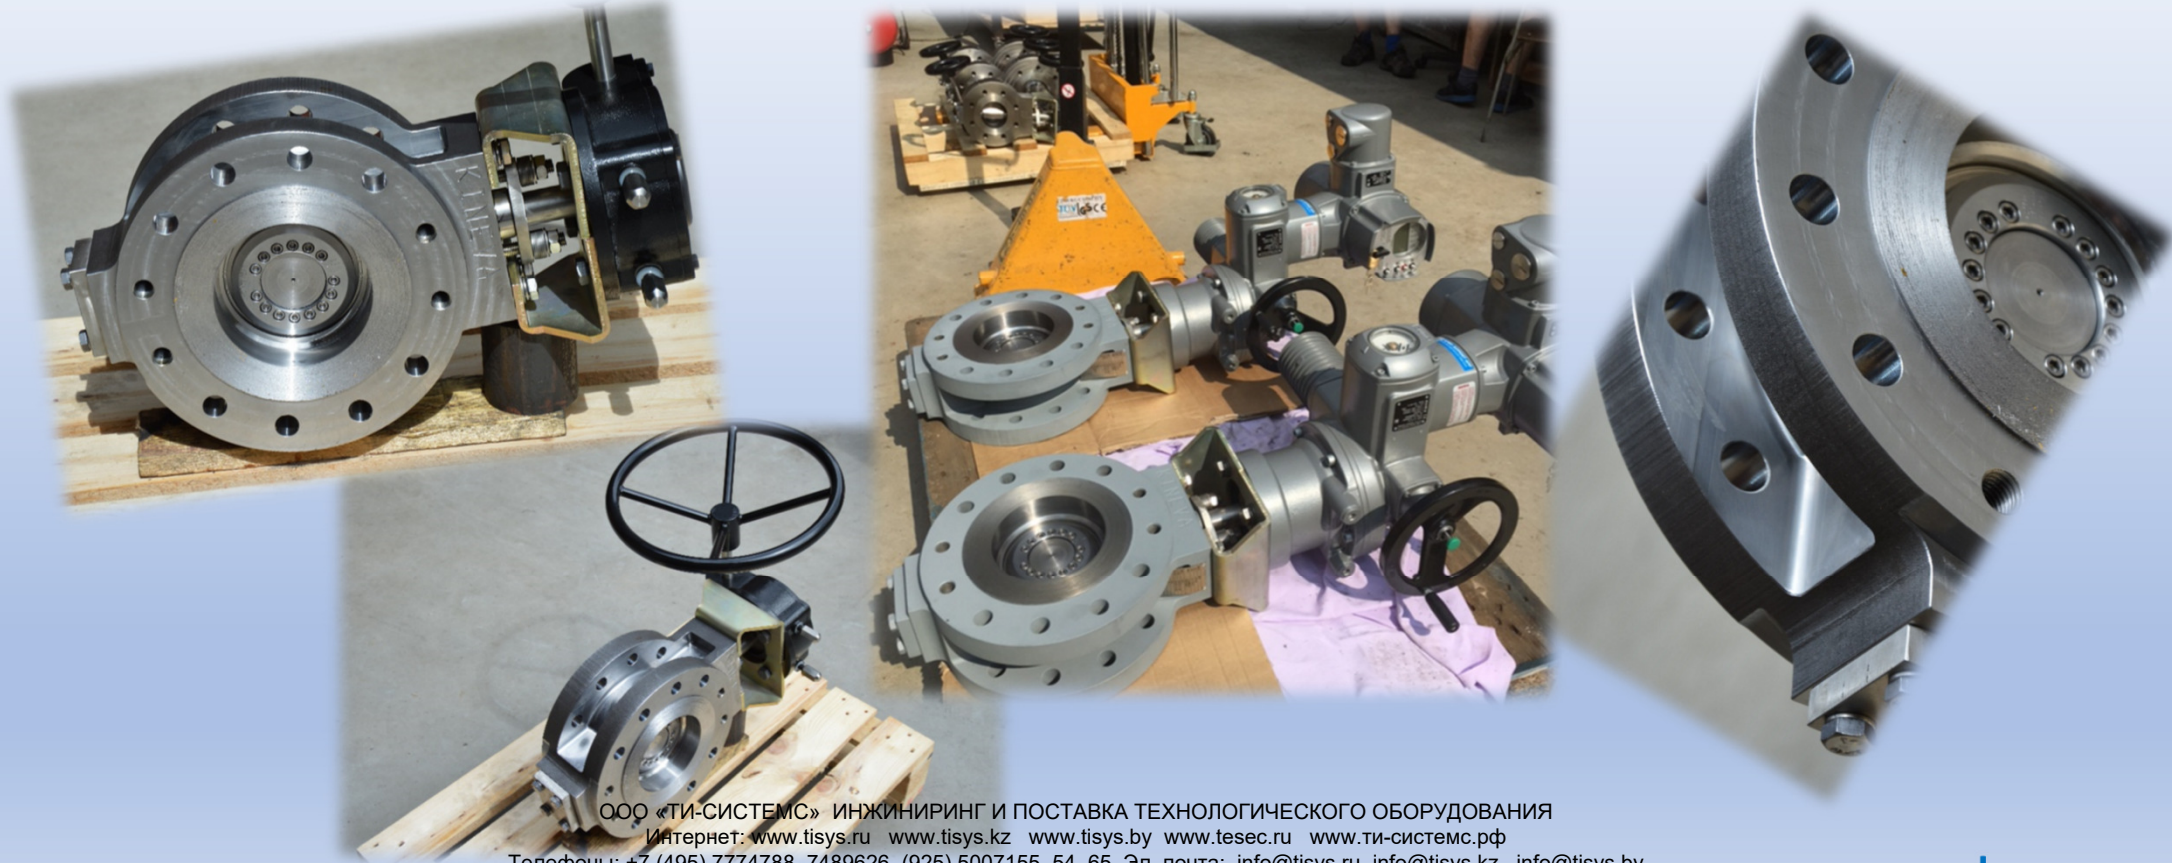


4 offset butterfly valves – DN800/DN1200, PN6, bidirectional tightness, flue gas 260°C, Ex



4 offset butterfly valves – DN300, Class300, butt welded ends,




4 offset butterfly valves – DN200, Class300, duplex, slurry, 200°C, 13.8bar

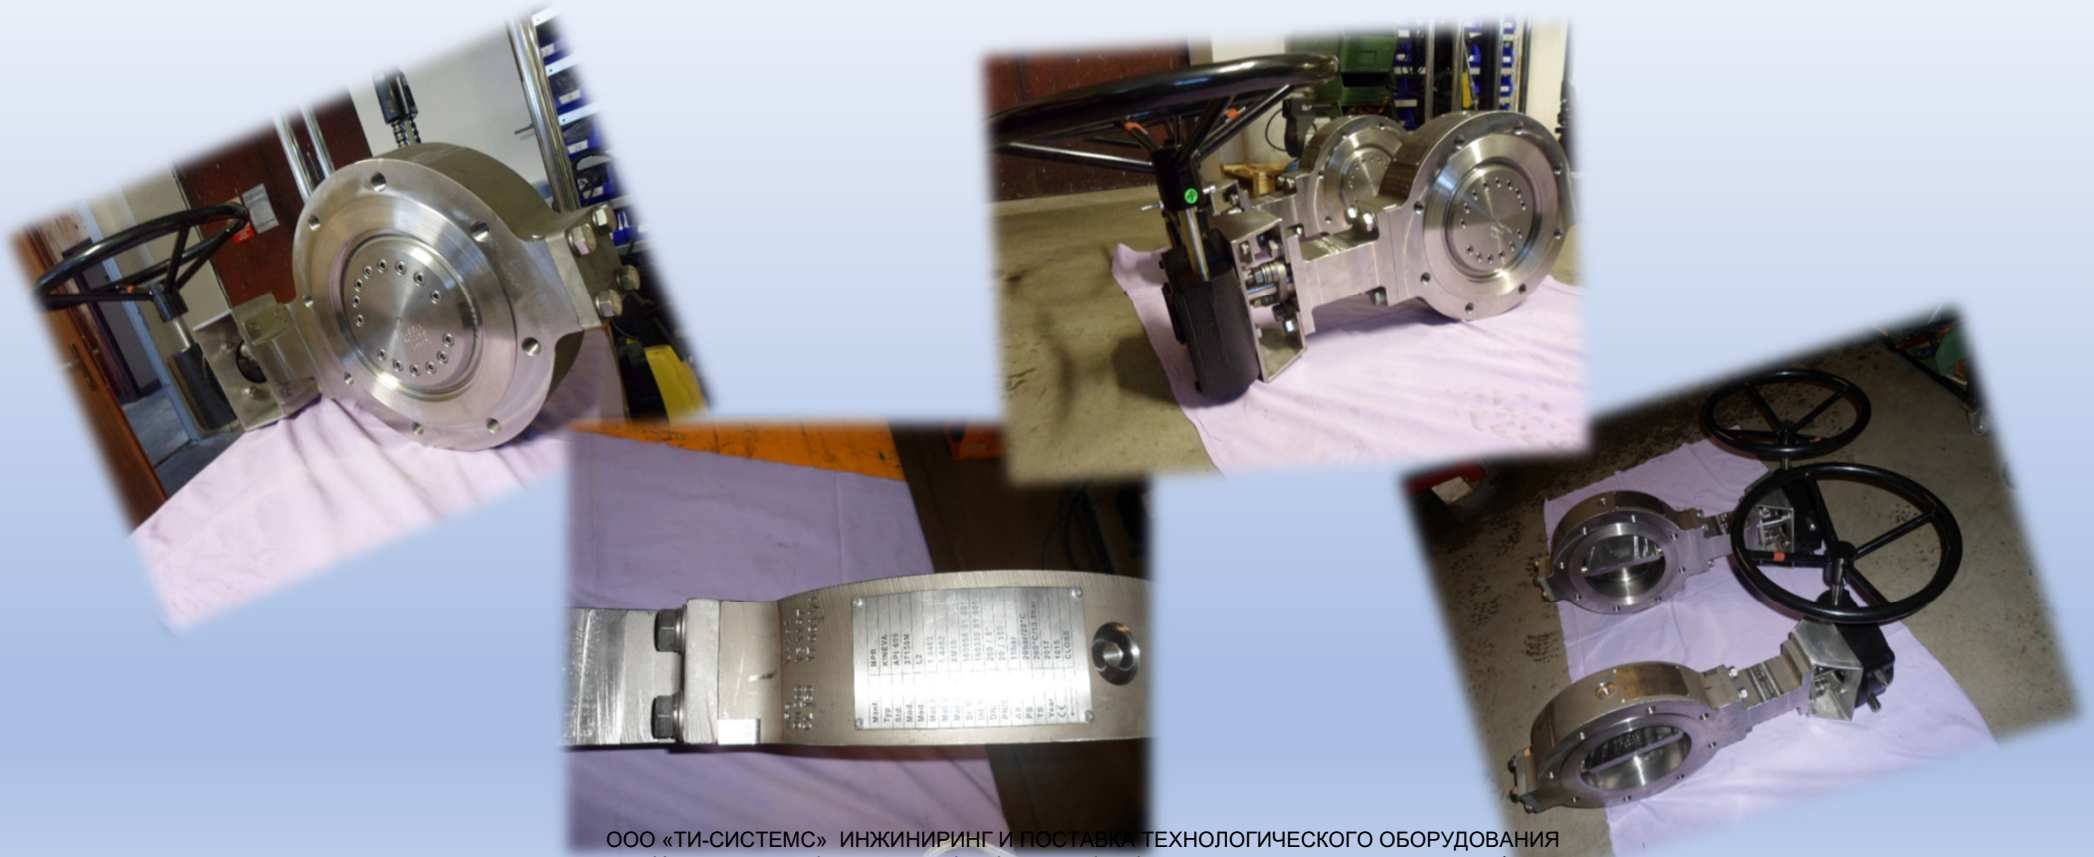

ООО «ТИ-СИСТЕМС» ИНЖИНИРИНГ И ПОСТАВКА ТЕХНОЛОГИЧЕСКОГО ОБОРУДОВАНИЯ
Интернет: www.tisys.ru www.tisys.kz www.tisys.by www.tesec.ru www.ти-системс.рф
Телефоны: +7 (495) 7774788, 7489626, (925) 5007155, 54, 65 Эл. почта: info@tisys.ru info@tisys.kz info@tisys.by

4 offset butterfly valves – DN300/150, Class150, solar power plant, Nitrate salts, 400°C

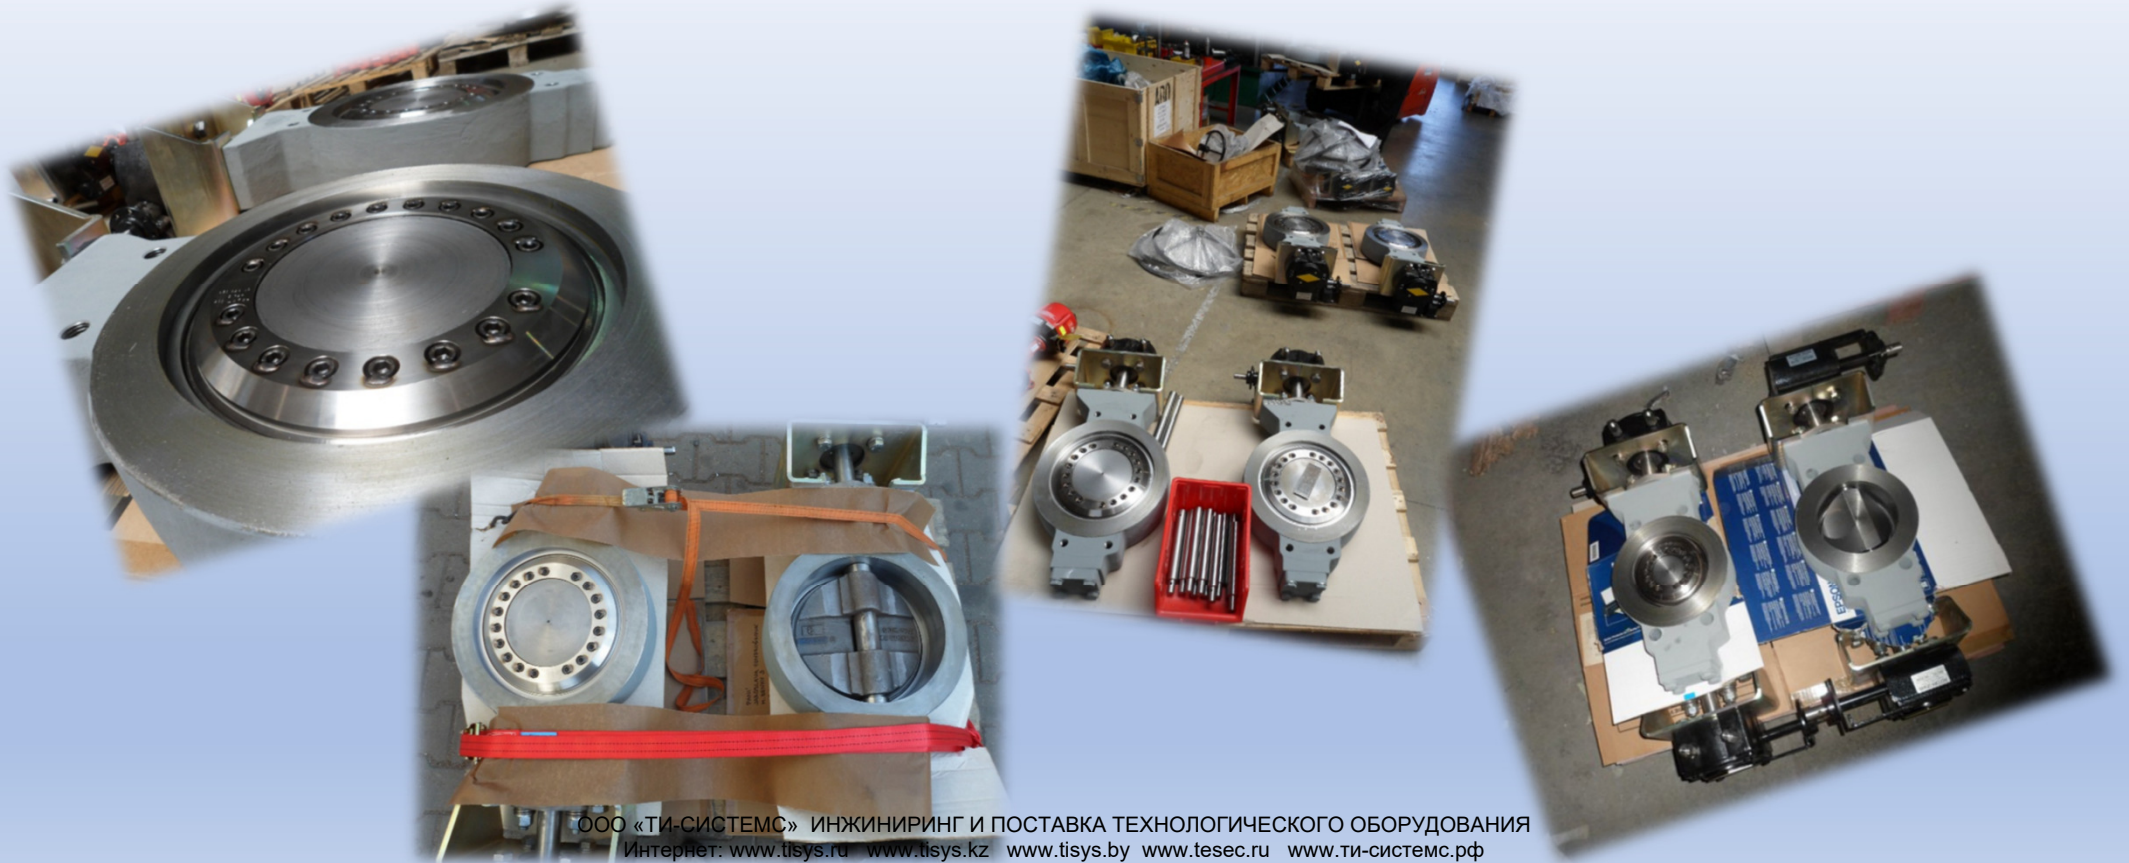

4 offset butterfly valves – DN200, PN160, steam 460°C, 79bar, quick closing



4 offset butterfly valves – DN300, Class900, steam 500°C, 68bar



4 offset butterfly valves – DN200-150, Class600, bidirectional tightness



4 offset butterfly valves – DN450, PN25, regulating element



4 offset butterfly valves – DN600, PN10, ss 1.4541, hydrogen cyanide, 200°C, 50kPa, bidirectional tightness




Kineva – DN300-100, PN16-40, amoniac water and gas, groove D acc to EN1092




KINEVA– DN600, CI300, 300°C, 8-9bar, steam, QC 250ms




KINEVA– DN200/300, Cl150, chemical water, 15bar, R-PTFE seat, ss 1.4307

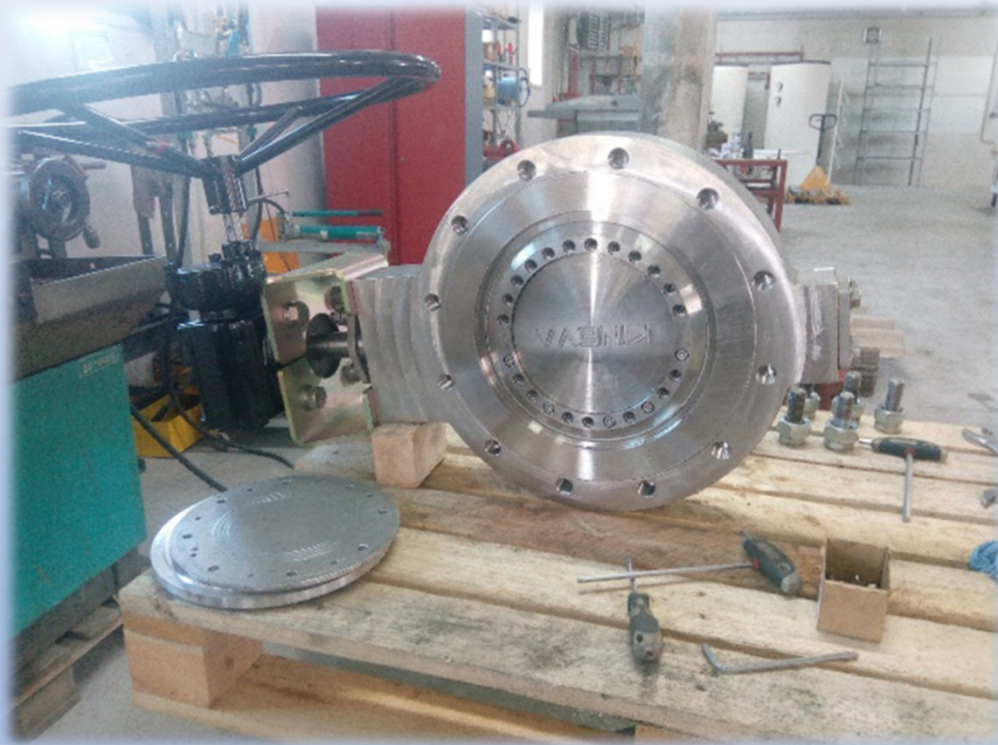


KINEVA– DN450 (reduced to DN250), Class600, steam, 30bar, 424°C, regulation

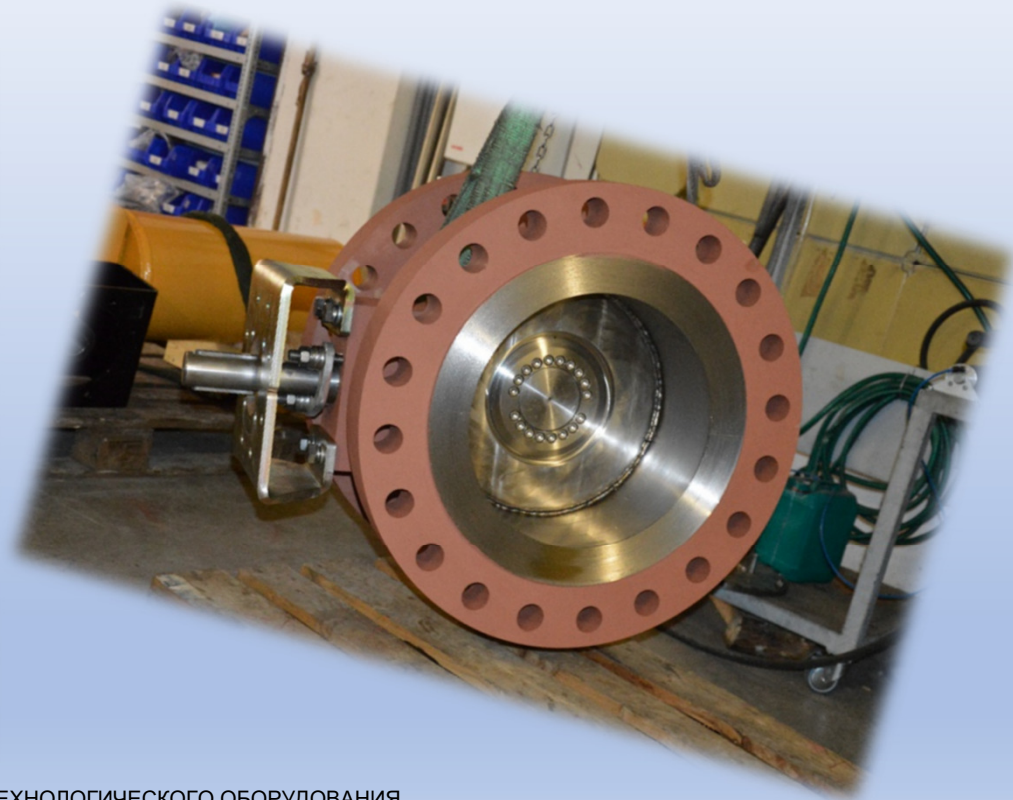


KINEVA – DN450, PN25, regulating element, steam 260°C, 7 bar

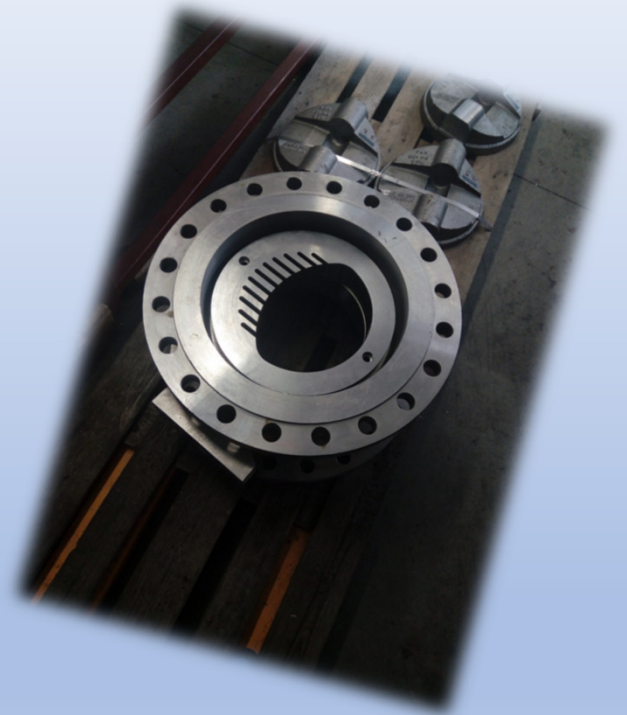

KINEVA– DN800-600, PN16, steam 4bar, 200°C

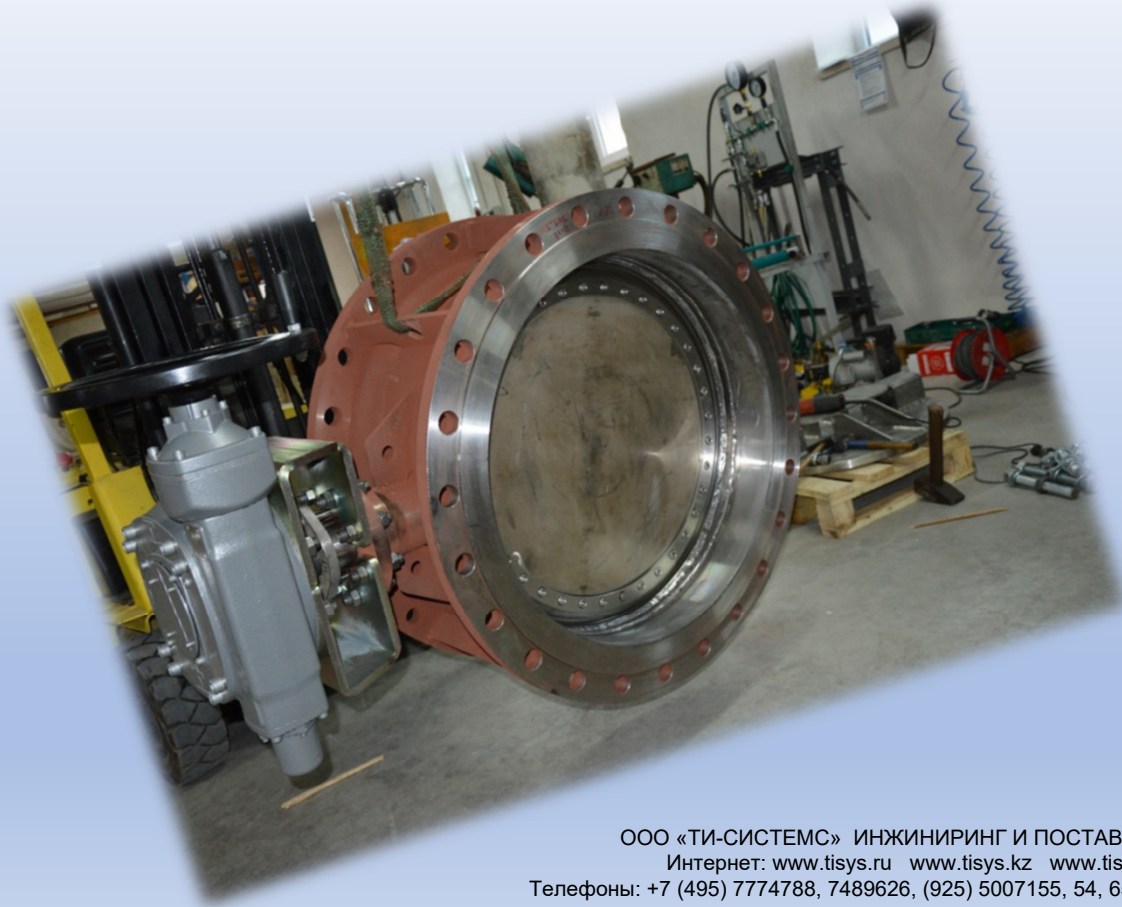

KINEVA – DN300/200, Class300, duplex steel

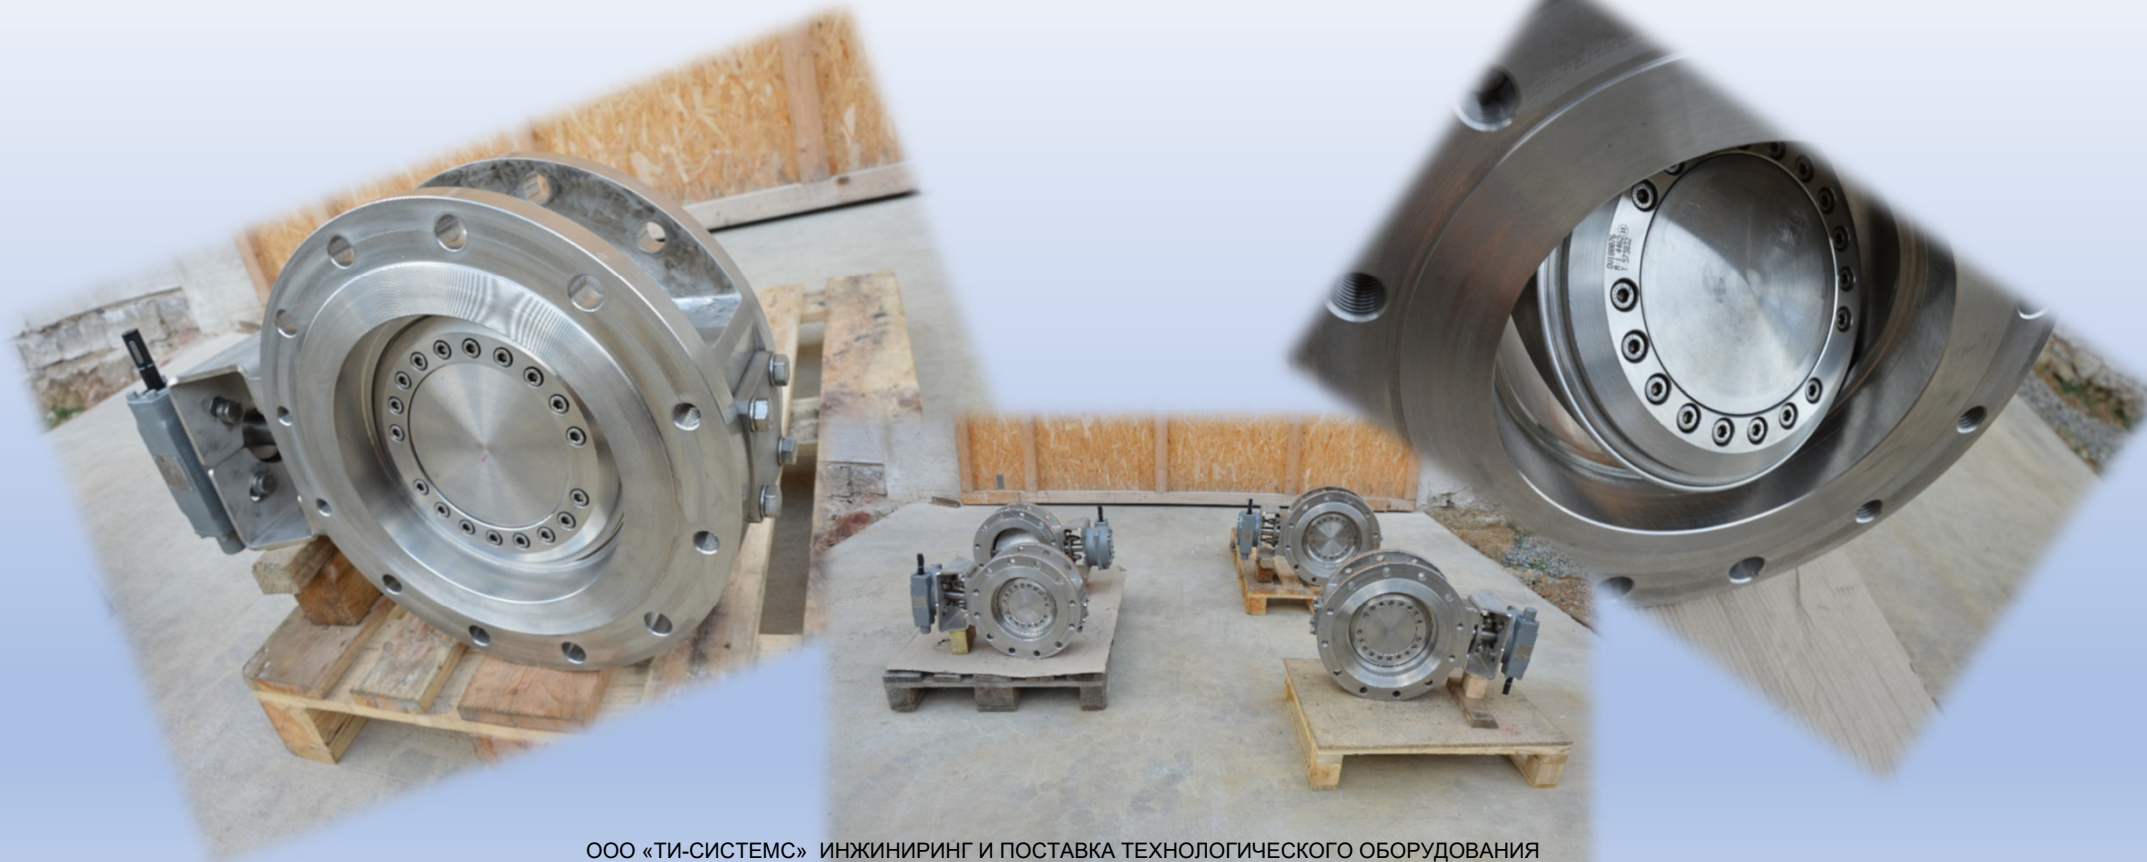

KINEVA – DN200, Lug, aluminum bronze C95500, metal seated



FLUEX DN1000-500, Flue gas over 150°C, HARDOX/HAR, external bearings

