





SOYVALVE

Dünyanın Vanasını Üretiyoruz / We Produce The World's Valve

Yaylı Dış Şarj Vanası(Düz Tip)

Overboard Valve Outside Spring Loaded(Straight Type)

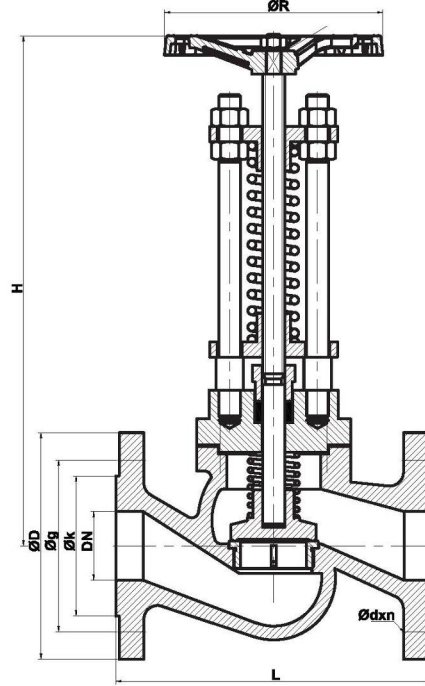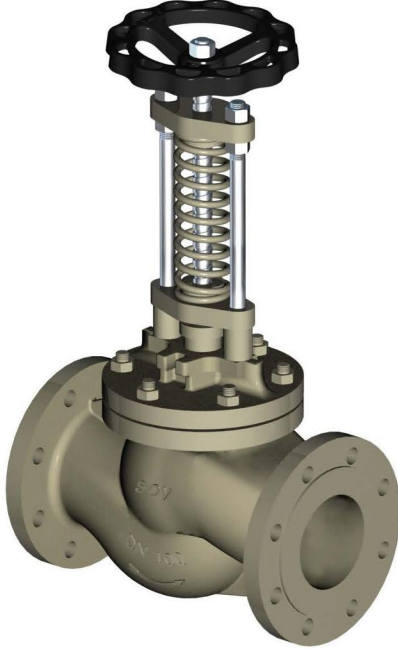

NO	PARÇA ADI	PART NAME	MATERIAL
1	GÖVDE	BODY	GGG40.3
2	SİT	SEAT	Alu-Bronze
3	MİL	STEM	AISI 420
4	KAPAK	BONNET	GGG40.3
5	KLAPE	DISC	RG5/AISI 420
6	CONTA	GASKET	AISI 420
7	SALMASTRA	PACKING	AISI 304
8	GLEN	GLAND	AISI 420
9	T CIVATA	T BOLT	6.8 STEEL

NO	PARÇA ADI	PART NAME	MATERIAL
10	YAY	SPRING	SPRING STEEL C
11	CIVATA	BOLT	8.8 STEEL
12	YAY YATAĞI	BEARING	GGG40.3 / RG5
13	SAPLAMA	STUDS	1040 STEEL
14	YAY	SPRING	SPRING STEEL C
15	SOMUN	NUT	6.8 STEEL
16	YAY BASKI GLENİ	SPRING PRESS GLAND	GGG40.3 / RG5
17	HENDİL	HANDWHEEL	GG25
18	SOMUN & PUL	NUT & WASHER	6.8 STEEL

DN	ØD	Øk	Øg	L	b	ØR	H	STROK	Ødxn	KG
15	95	65	45	130	14	110	260	9	14x4	5,7
20	105	75	58	150	16	110	260	9	14x4	6,5
25	115	85	68	160	16	110	270	12	14x4	8
32	140	100	78	180	18	140	290	13	18x4	9,5
40	150	110	88	200	18	140	320	15	18x4	12,5
50	165	125	102	230	20	160	385	20	18x4	16
65	185	145	122	290	20	160	415	22	18x4	21,5
80	200	160	138	310	22	200	450	25	18x8	28
100	220	180	158	350	24	220	585	30	18x8	38
125	250	210	188	400	26	250	575	34	18x8	64
150	285	240	212	480	26	300	575	42	22x8	85
200	340	295	268	600	30	400	800	55	22x12	160
250	405	355	320	730	32	520	980	65	26x12	217
300	460	410	370	850	32	520	1020	78	26x12	298

UYGULAMA ALANLARI / APPLICATIONS

DENİZ SUYU VE TATLI SU / SEA WATER AND FRESH WATER
ÇALIŞMA ŞARTLARI / WORKING CONDITIONS : DIN 2401
BAĞLANTILAR / ENDS DIN 1092-2

ÇALIŞMA SICAKLIĞI / WORKING TEMP -10 / +180 °C
ÇALIŞMA BASINCI / WORKING PRESSURE: PN16
FACE TO FACE DIMENSIONS TS EN 558-1