



Termomeccanica Industrial Process

Termomeccanica Group



Thermal Oxidation plants

February 2016

ООО «ТИ-СИСТЕМС» ИНЖИНИРИНГ И ПОСТАВКА ТЕХНОЛОГИЧЕСКОГО ОБОРУДОВАНИЯ
Интернет: www.tisys.ru www.tisys.kz www.tisys.by www.tesec.ru www.ти-системс.рф
Телефоны: +7 (495) 7774788, 7489626, 5007155, 54 Эл. почта: info@tisys.ru info@tisys.kz info@tisys.by


Thermal Oxidation of gaseous waste

Typical Processed Stream:

- Contaminated Air by Hydrocarbons
- Contaminated Air by Solvents
- Contaminated Air by Stripping/Scrubbing
- Vent stream
- Vent containing Chlorinated compounds
- Vent containing Nitrogen compounds

Process Solution:

- Thermal Oxidizer (TO)
- Recuperative Thermal Oxidizers
- Regenerative Thermal Oxidizers (RTO)
- Catalytic Thermal Oxidizers

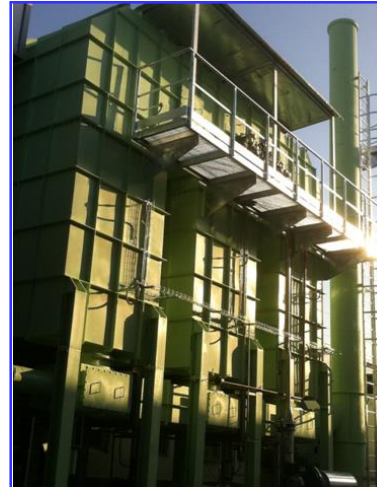

Thermal Oxidation with flue gas treatment

Process Data

- **Type:** Thermal Oxidizer
- **Source of wastes:** air from copper scrap foundry
- **Pollutants in Air:** HCl, HF, SO₂, CO, VOC particulate
- **Oxidation Temperature:** 850 °C
- **Residence Time:** 2 sec
- **Plant sections:** Quench, Dry abatement with chemical injection and final scrubber



Thermal Oxidation with heat recovery

Combustion treatment of
30'000 m³/h stream

Vertical combustion chamber
configuration with heat
recovery through production
of overheated water



Gas combustion plant.
Incineration of gas streams
coming from solvent polluted
water stripping plant.



Thermal Oxidation with flue gas treatment + heat recovery

Process Data

- **Type:** Thermal Oxidizer
- **Source of wastes:** gaseous waste from barium sulphate production
- **Flow rate:** about 9'000 Nm³/h
- **Oxidation Temperature:** 850 °C
- **Residence Time:** > 2 sec
- **Heat recovery:** about 3'500 kW
- **Plant sections:** Ceramic filter, Dry abatement with chemical injection




Regenerative Thermal Oxidizer (RTO)

Principal features:

- ❖ Low fuel consumption
- ❖ Internal heat accumulator by ceramic media
- ❖ Possible autothermal condition (depending on solvent concentration)




Operative scheme:

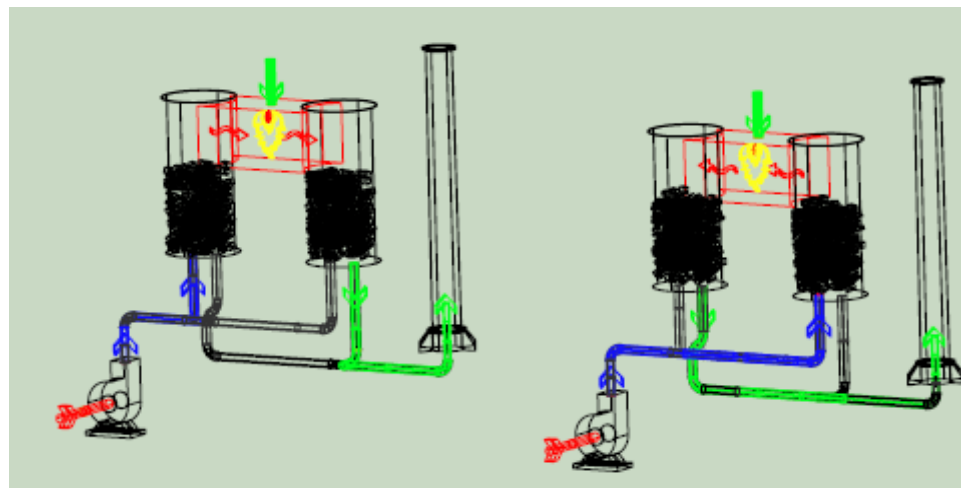

Regenerative Thermal Oxidizer (RTO)


Different **types of packings**, depending on application and desired heat recovery

- Standard ceramic media



For all types of applications
(for fouling air application)

- Honeycomb ceramic media

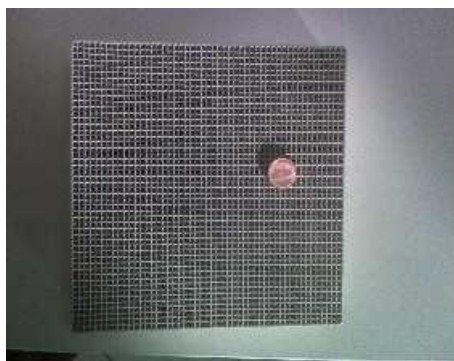

To improve heat recovery




Configurations

RTO can be designed using different number of ceramic media canisters, depending on flow rate.

Typical configurations are:

3 canisters

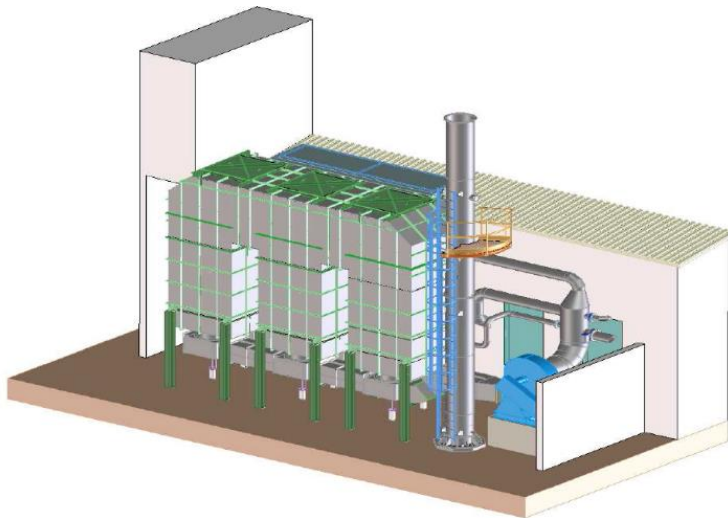


5 canisters



Control system

TM.I.P. oxidizers are completed by a control system which permits to manage all the variables in the plant, such as switch times, pressure and temperatures.

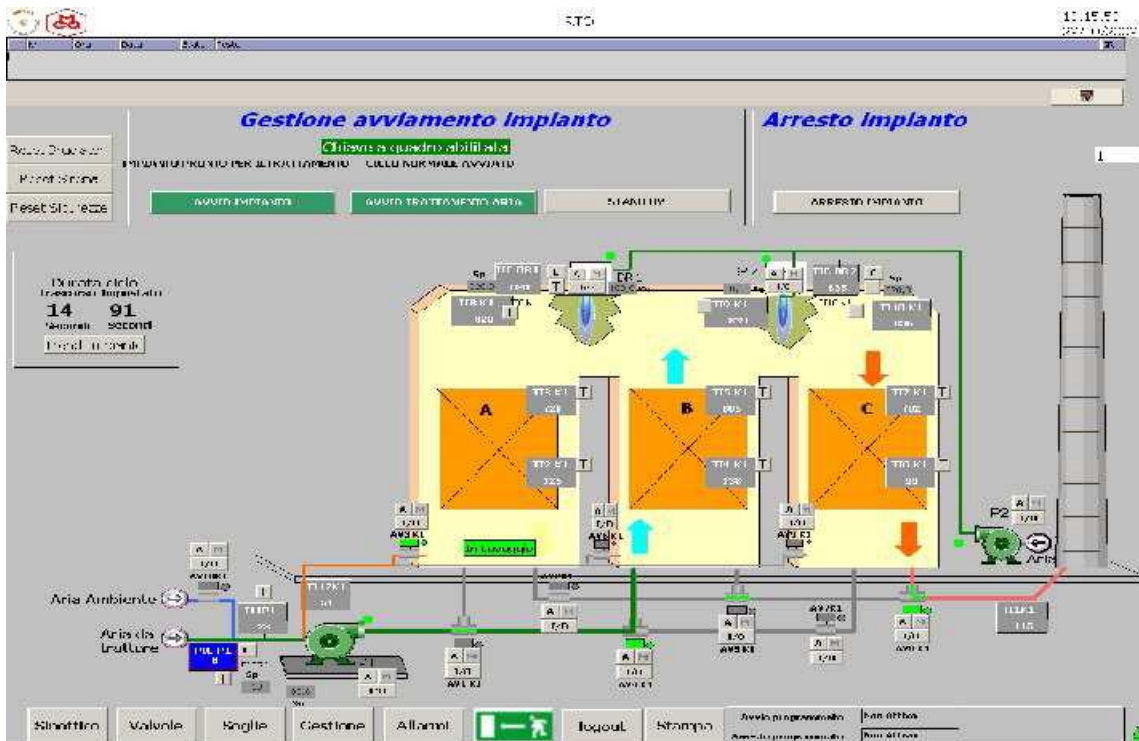

The control system is designed to permit real time plant checking.



RTO with heat recovery

Process Data

- **Type:** RTO
- **Source of wastes:** Air from Film Metalization
- 5 canister with heat recovery by thermal oil
- **Capacity:** 65'000 Nm³/h
- **Solvent:** Ethyl Acetate, MEK 1-3 gr/Nm³



Process Data

- **Type:** RTO
- **Source of wastes:** Air from Plaster bandages production
- 3 canister with heat recovery by thermal oil
- **Capacity:** 15'000 Nm³/h



RTO with heat recovery



Flow-rate: 10'000 Nm³/h coming from a solvent coating line for the production of plasters.

HEAT RECOVERY SYSTEM

for the Production of THERMAL OIL

Flow-rate: 20'000 Nm³/h coming from a production line of fire and mildew resistant tapestry
HEAT RECOVERY SYSTEM
for the production of hot water



RTO with flue gas treatment

Process Data:

- **Type:** RTO for Air contaminated by Chlorinated Compounds - 2 canisters with compensation chamber
- **Source of wastes:** Wastewater treatment plant and Pharmaceutical production plant
- **Capacity:** 5'000 Nm³/h
- **Hydrocarbons in Air:** 2-5 g/Nm³ (Xilene, Toluene, Methylene Chloride, IPA, Acetone, n-Heptane)
- **Guarantee:**
 - Outlet NO_x concentration: < 150 mg/Nm³
 - Outlet TOC concetration: < 20 mg/Nm³
- **Plant sections:** Final scrubber and Dry abatement




RTO downstream stripping process

Exhausted process air, containing stripped solvent vapours is fed directly to the oxidation system "RTO" (Regenerative Thermal Oxidation) of gaseous stream and vents.

Due to very high heat recovery in RTO system, difference between inlet and outlet temperature of gas doesn't exceeds 70°C , with a working temperature in combustion chamber of about 850°C .


RTO plant consists of three packing beds and a combustion chamber where burned is installed.

Waste gas passes through two beds where it is preheated by hot packing heated during previous cycles.

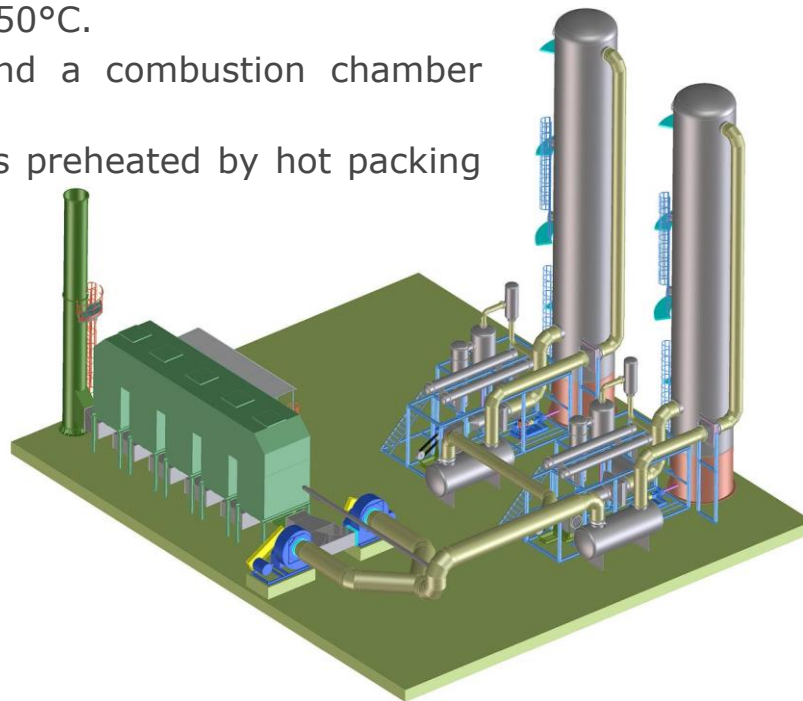

RTO downstream scrubbing process

- **Process Data**
- **Type:** RTO 5 Canister
- **Source of wastes:** Solvent scrubbing
- **Flow rate:** 75'000 Nm³/h Air from maleic anhydride production and 1600 kg/h waste liquid (15% Organics) from scrubber of maleic anhydride

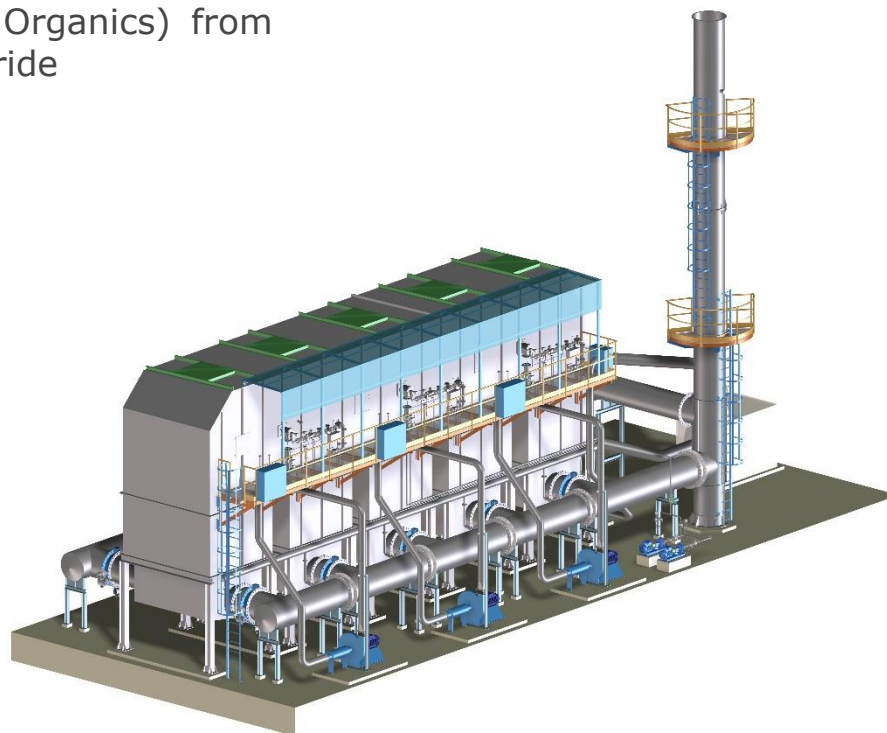


Catalytic Thermal Oxidizers

Catalytic combustion plants operate pollutant oxidization through the use of a catalyst in order to lower combustion temperature.

While thermal combustors normally operate at temperatures above 800°C, catalytic combustor never exceed 500°C (normally 300°C – 450°C).

Catalytic combustors cannot operate in presence of streams that contain substances that could foul the catalyst reducing its efficiency.

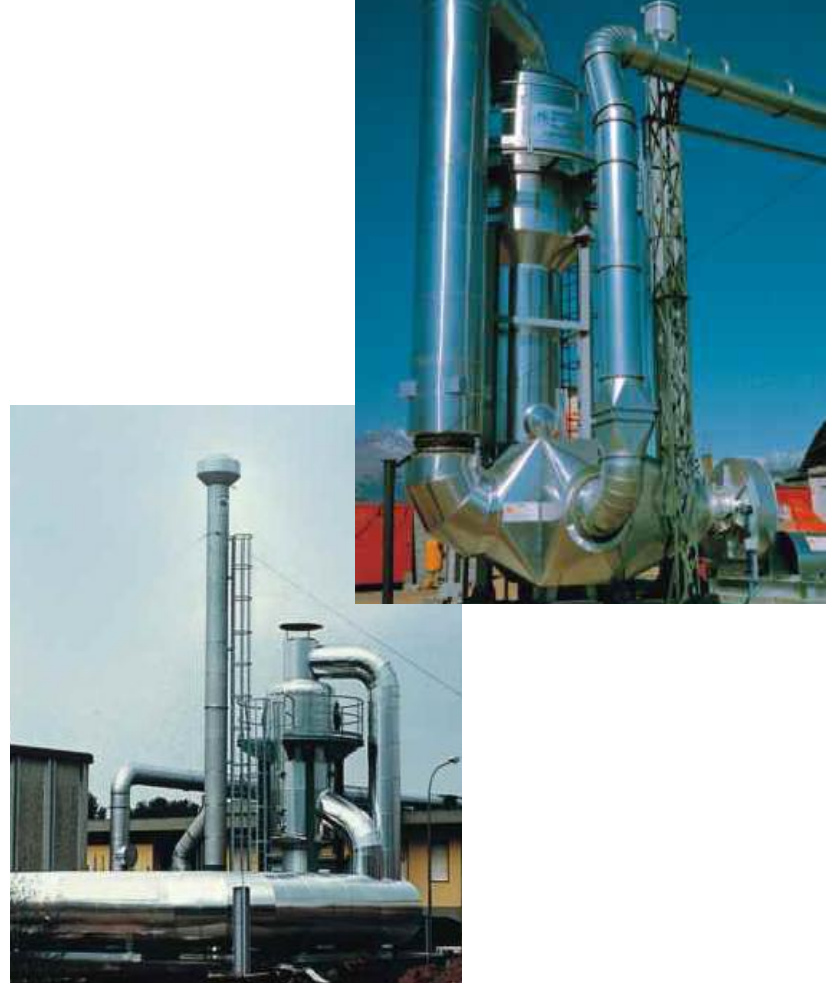



Termomeccanica Industrial Process

Termomeccanica Group





Thermal Oxidation of “liquid waste + gaseous waste”

ООО «ТИ-СИСТЕМС» ИНЖИНИРИНГ И ПОСТАВКА ТЕХНОЛОГИЧЕСКОГО ОБОРУДОВАНИЯ
Интернет: www.tisys.ru www.tisys.kz www.tisys.by www.tesec.ru www.ти-системс.рф
Телефоны: +7 (495) 7774788, 7489626, 5007155, 54 Эл. почта: info@tisys.ru info@tisys.kz info@tisys.by

Thermal Oxidation of «liquid waste + gaseous waste»

Some industrial process produce highly pollutants liquids and gaseous containing solvents or organic compounds, which can not be treated in conventional plants. There are also a huge quantity of distillation residuals and sludge

TM.I.P. build thermal oxidizers working up 1200°C completed with heat recovery system and flue gas cleaning section (dry or wet removal acids).

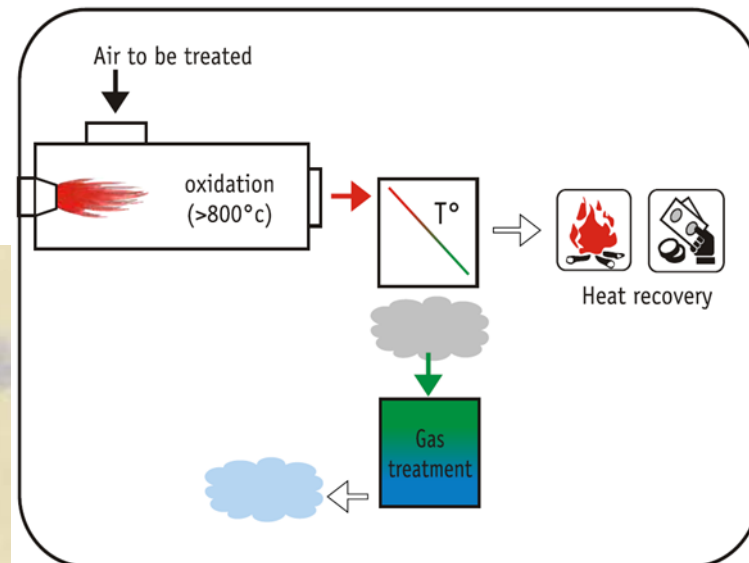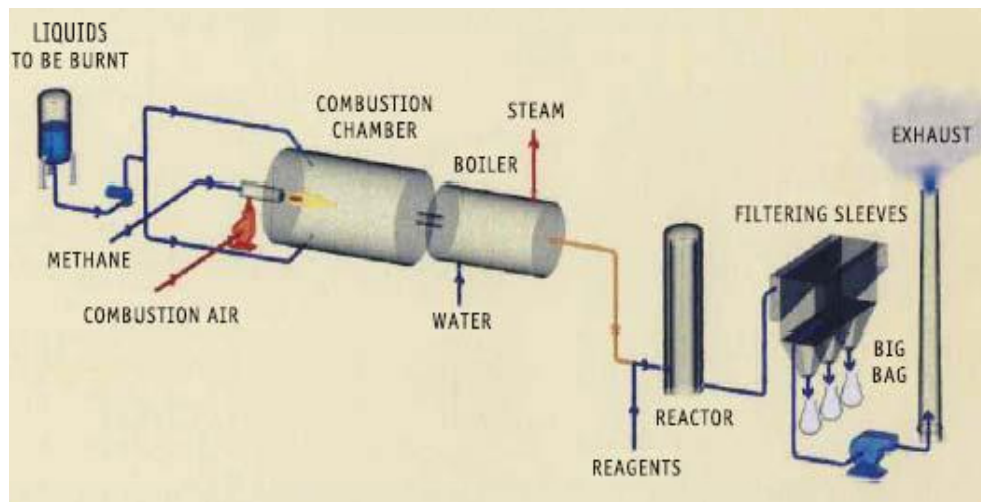

Thermal Oxidation of «liquid waste + gaseous waste»

Typical Processed Stream

- Liquid waste
- Water contaminated by organics
- Vent stream
- Stream containing Chlorinated compounds
- Stream containing Nitrogen compounds

Process Solution



- Static Chamber with Injection Nozzles for liquid waste and distributor for Vent streams
- Afterburner
- Heat Recovery
- Flue gases treatment



Thermal Oxidation of «liquid waste + gaseous waste»

Process Data

- **Type:** Horizontal Static Chamber with Injection nozzles for liquid waste and distributor for Vents
- **Source of wastes:** Pharmaceutical Wastes
- **Oxidation Temperature:** up to 1100 °C
- **Residence Time:** 2 s
- **Oxygen Concentration Flue Gases:** 6 % vol.
- **Plant sections:** Steam Boiler, Flue Gases Treatment

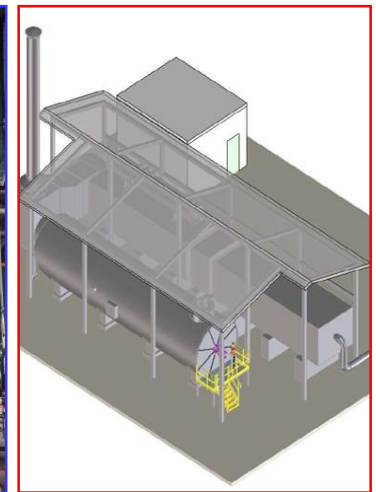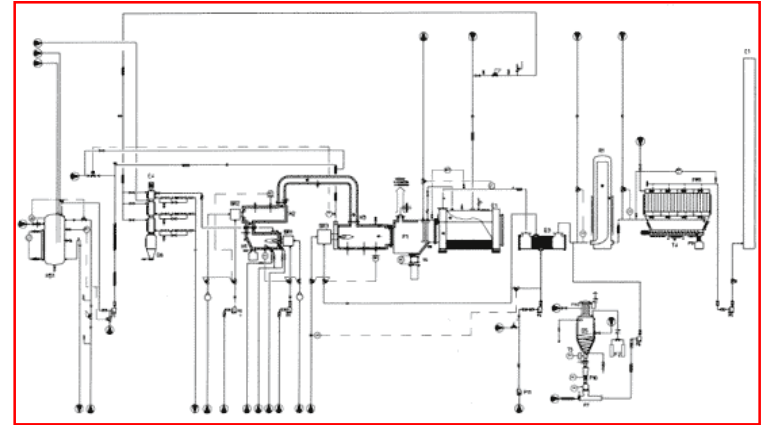

Thermal Oxidation of «liquid waste + gaseous waste»

Process Data



- **Type:** Horizontal Static Chamber with Injection nozzles for liquid waste and distributor for Vents
- **Source of wastes:** Solvent Stripping from Wastewater
- **Oxidation Temperature:** 950 °C
- **Residence Time:** 2 s
- **Plant sections:** Steam Boiler, NO_x thermal reduction with Ammonia injection, Dry Treatment for Flue Gases





Termomeccanica Industrial Process

Termomeccanica Group

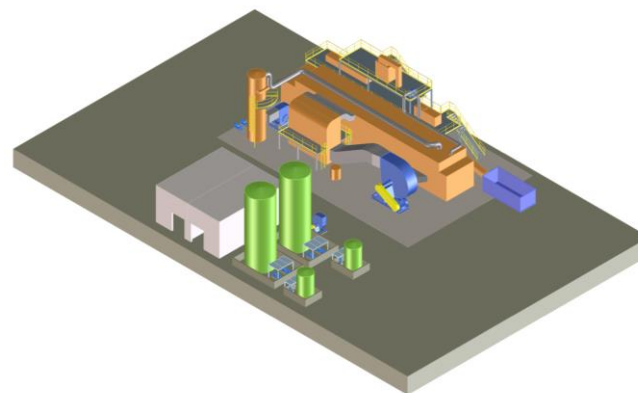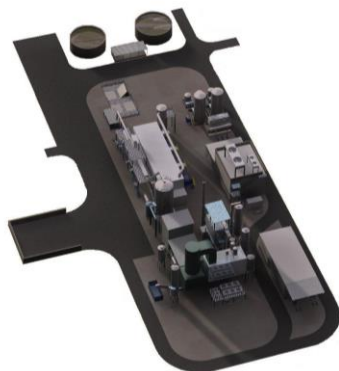

Thermal Oxidation of Sludge

ООО «ТИ-СИСТЕМС» ИНЖИНИРИНГ И ПОСТАВКА ТЕХНОЛОГИЧЕСКОГО ОБОРУДОВАНИЯ
Интернет: www.tisys.ru www.tisys.kz www.tisys.by www.tesec.ru www.ти-системс.рф
Телефоны: +7 (495) 7774788, 7489626, 5007155, 54 Эл. почта: info@tisys.ru info@tisys.kz info@tisys.by

Technologies for Sewage Sludge

The company TM.I.P. S.r.l. should supply “Turn Key” plant for sewage sludge that coming from Municipal and Industrial Wastewater Treatment Plant (WWTP).

As a consequence of the sludge production which is increasing, whereas disposal routes are narrowing, is a progressive further rising in costs. There are two aims with regard to sludge:

- the reduction of the amount of sludge produced by thermal drying;
- the recovery of energy by thermal valorization of dried sludge;

A complete plant with both drying and thermal valorization decrease utilities consumption and completely reduce sludge disposal .



Sludge treatment characteristics

Dewatering Machine:

- Plate filter;
- Belt Filter press;
- Centrifuge;

Wet Sludge Typical Mass Rate	50-200 ton/day
Wet Sludge Solid content	20-30 % wt.
Dried Sludge Solid content for Thermal Valorization	90-95 % wt.
Operating Hours	8000 hr/y, 24 hr/day

Guide line for this project:

- To reach 90-95 % of dried solid;
- To reach solid suitable for Pyrolysis treatment and synerization;
- To respect EU rules for gaseous emission;




Main sections

SECTIONS THAT COULD BE SUPPLIED :

- ✓ Dried Sludge Storage (Underground Pit, Storage Tanks, Chain Conveyors)
- ✓ Drying Plant (Belt Drier, Heat Exchangers, Air Fan, Condensation Tower)
- ✓ Steam Boiler
- ✓ Washing Treatment for Exhaust Gas coming from Drier (Scrubbers, Bio-Filter, RTO)
- ✓ Dried Sludge Storage
- ✓ Thermal Valorization of Dried Sludge (Rotary Kiln, Chemicals Injection Systems, Thermal Oil/ Steam production)
- ✓ Electricity Production (ORC, Steam Turbine)
- ✓ Flue Gas Treatment (Dry and Wet Treatment)



Flow scheme of drying plant

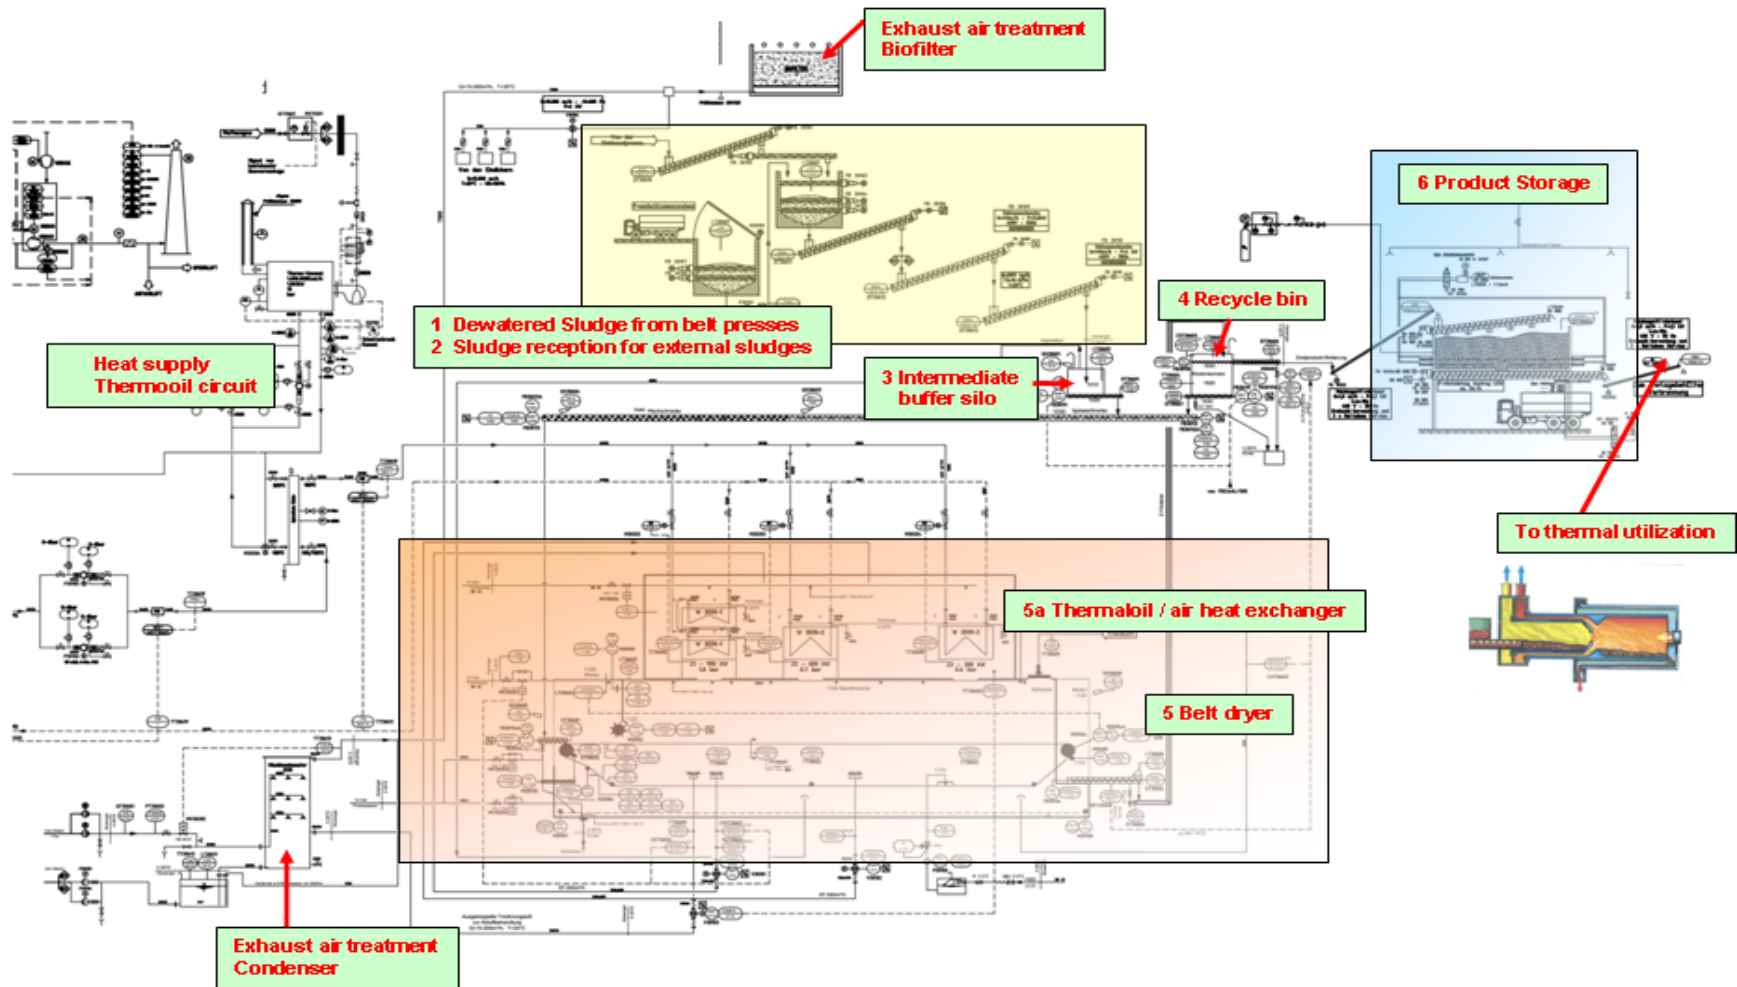

Exhaust air treatment

Outlet Composition from chemical washing system for exhaust air coming from belt drier (CHEMICAL SCRUBBERS + BIO FILTER):

Odor Unit	1000 OU/Nm ³
Particulate	10 mg/Nm ³
VOC	250 mg/Nm ³
NH ₃	20 mg/Nm ³
H ₂ S	2 mg/Nm ³



Exhaust air treatment

For some applications , where is very difficult to remove odours by bio-filter (odours of ammine, sulfur compounds and others) a Regenerative Thermal Oxidizer (RTO) system is foreseen instead chemical washing and it can be guaranteed followings limit: :

OUTLET COMPOSITION REGENERATIVE THERMAL OXIDIZER

Odor Unit	200 OU/Nm ³
VOC	20 mg/Nm ³
SO _x	50 mg/Nm ³
CO	100 mg/Nm ³
NO _x	150 mg/Nm ³



Thermal valorization and heat recovery

Because of very high costs of fuel there is possibility to thermal valorize dried sludge to produce electricity and recover heat that can be use for sludge drying.

